


## Features & Data Sheet

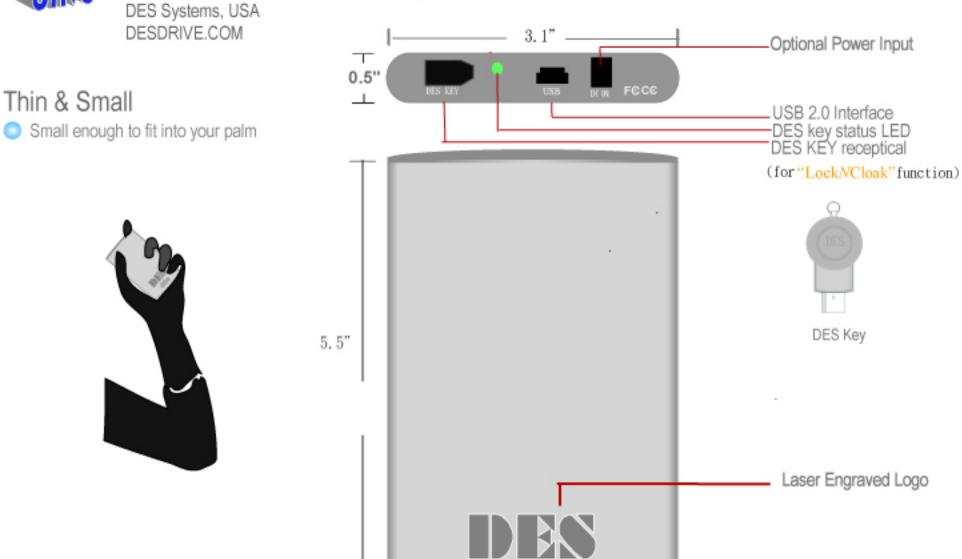

Data Security

"Lock/VCloak" Data Security Techology Demystified

Standard Mobile Hard Disk

drive

- Automatic real time data encryption/decryption No delay in data access. Play AVI, MP3 or access data directly from it.
- Easy to use, with no learning curve
- DES drive features unique easy to use "LockNCloak" double security data protecton

Lock: (=DES Key) Cloak: (=cipher chip) Use your physical


scheme to provide the ultimate protection for your private information.

removable DES KEY to lock your hard disk. Just remove the DES KEY, your DES drive is dead locked. Never worry about unauthorized access to your private data, while you are away from your computer.

All files you stored in the DES Drive are automatic encrypted to NIST DES/TDES standard through hardware build in powerful real time cloaking engine. Never worry about your sensitive private data being exposed even if you lost your drive.


Smart Speed LED

Data Access LED

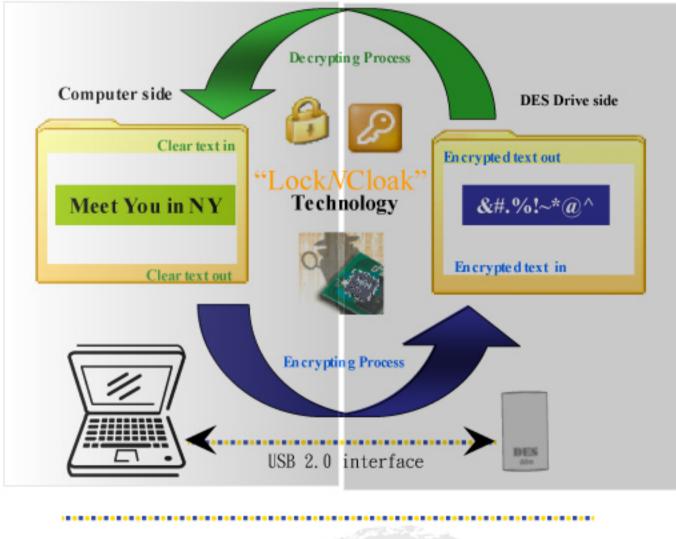

### DES Drive smart LED is capable to detect what USB speed your computer is running at.

Smart LED

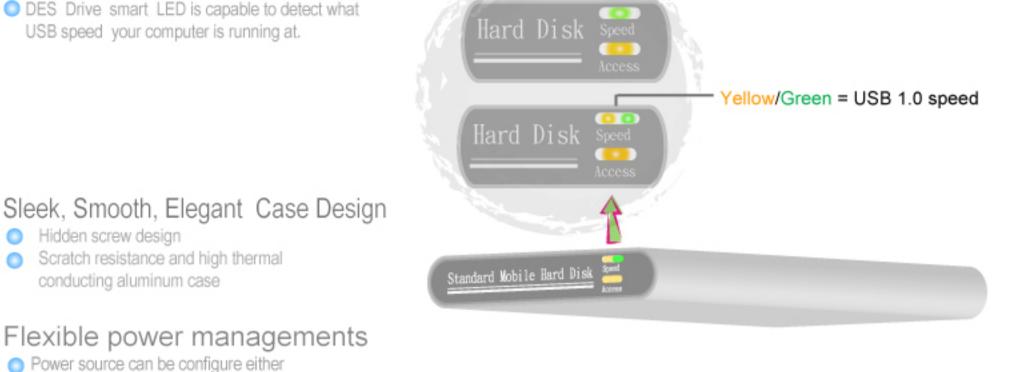

Green light = USB 2.0 high speed

# conducting aluminum case Flexible power managements

 Power source can be configure either through A/C adapter, or USB BUS power. (both are included accessories)

Scratch resistance and high thermal


Compatibility

Hidden screw design

through USB interface Plug in and out without shuting down computer.


You can store data from any of these devices

- No driver instalation needed, true Plug & Play,

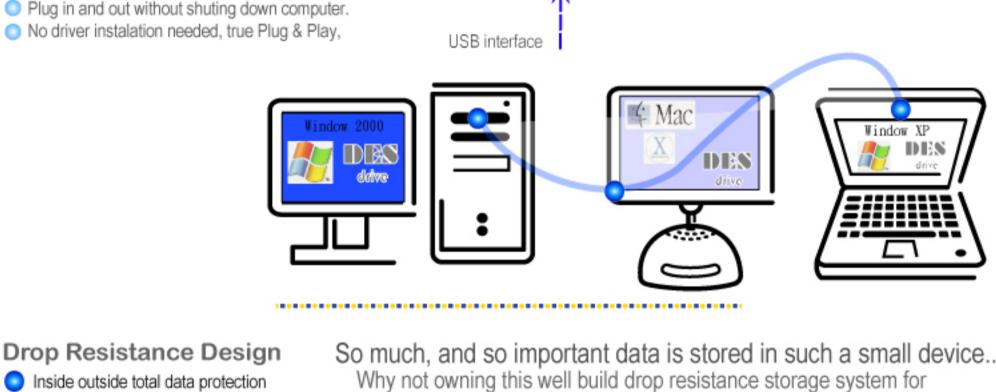

 Accidents do happen, but with DES Drive you get addtional anti shock protection your data needs. The build-in anti shock padding mechanism and rugged aluminum case allows DES drive to withstand 3ft drop on the bare floor.



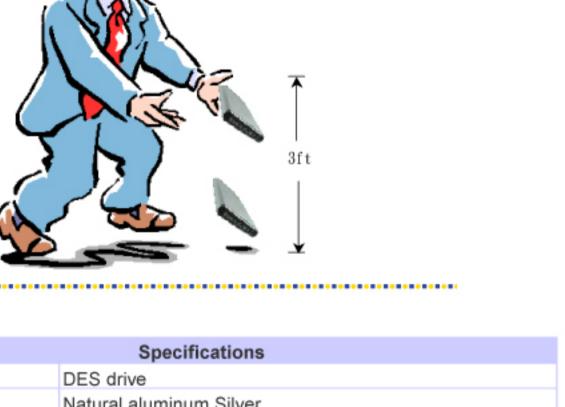

extra insurance?

Specifications	
Model Name	DES drive
Color	Natural aluminum Silver
Case Material	Aluminum
Interface	USB 2.0 High-Speed and USB 1.1 compliant DES Systems – Proprietary DES key interface
Data Transfer Rate	USB 2.0 up to 480Mbps (60MB/sec) *USB 1.1 up to 12Mbps (1.5MB/sec)
Capacities	Varies depend on model purchased
Encryption strength	Standard NIST DES/TDES
LED Indicator	status
Connectors	1 mini 5-pin USB 2.0 (USB 1.1) port 1 power jack 1 DES key socket
Power Supply	Bus powered, if host computer allows External A/C Switching adaptor - Input: 100 ~ 240V (47 ~ 63Hz), 0.3A 15VA - Output: 7.5V, 1.2A, 9W
Warranty	365 days
Hardware Requirements	USB/USB2.0 port or MAC with Standard USB/USB2.0 port 32MB RAM or higher
OS Compatibility	*Windows Me/2000/XP *Mac OS X higher
Dimensions (W x D x H)	140x80x16 mm
Weight	Less than 200.0 Gram
Agency approval	FCC, CE
Environmental Specifications	Operating temperature range: 5°C to 50°C, 8% to 90% RH (non condensing) System operating temperature gradient 20°C /h or less Storage temperature range: -40°C to 65°C, 5% to 95% RH (non condensing)

Max. wet bulb 29°C(Op.)/ 40°C(Non Op.)